

SPEED[®]

CHAIN ELECTRIC HOIST



**DUAL
SPEED**

Y-SERIES

- ▶ Trust worthy-convenient in handling.
 - ▶ Compact and light weight.
 - ▶ Sturdy Design.
 - ▶ Has short head room.
 - ▶ Ideal for heavy lifting - smoothly.
- Can be matched with all types of trolleys.

WARRANTY :
We Provide one year's
Warranty against any
manufacturing defects.
Ex. Our works


Established : 1964
Manufactured by:

R. N. SURESH TOOLS CORPN.
MUMBAI - 400 003.

HIGHLY RELIABLE

SPEED[®]

CHAIN ELECTRIC HOIST

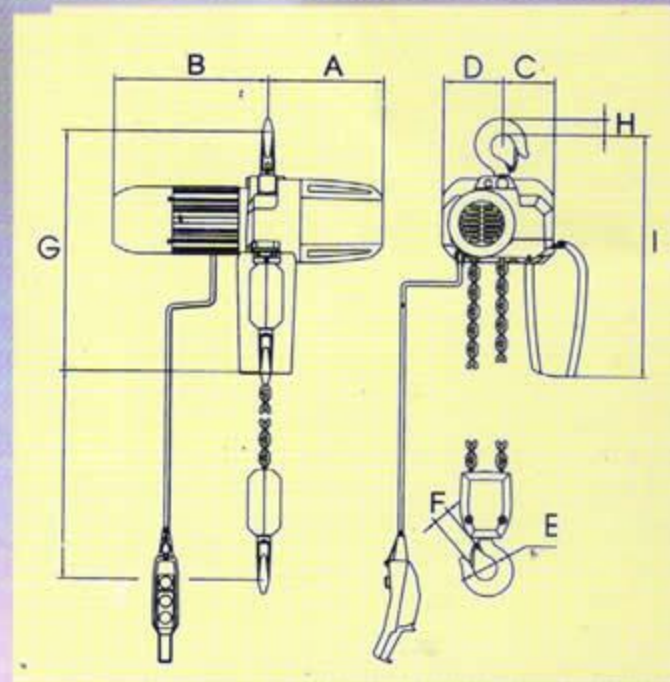

**DUAL
SPEED**

Y-SERIES

- Chain : Alloy Steel-Grade-80- Heat-Treated, for safe and long term use.
- Hooks : Alloy steel.
- Motor : Extremely competent -DUAL- SPEED-having tried and trusted capability.
- Push Button : Safe operation, on low Voltage of 24 V, for complete safety.
Double Action Push Button-for Both Speeds.
- Limit Switches : Protect, Against Damage, to the equipment and material.
Assures operator safety .
- Body : Light Weight-High Density-Aluminium-casting body.
High gloss Powder Coated.
- Brake : Extremely Efficient & Safe.
Load Wheel, Gears and Pinions, are machined from High Grade Alloy-Steel and Heat-Treated.
- Capacities : From 500 kgs. to 2000 kgs.

Specifications

TESTED TO 25% OVERLOAD - STD. LIFT : 3 METERS

Rated Capacity Kgs.	Std. Lift Meters	LIFTING SPEED (M/Min.)		MOTOR 3 PHASE - 380 - 440 V. 50 Hz - KW		LOAD CHAIN DIA MM NO OF FALLS		TEST LOAD KGS.	Net Weight KGS.	Min. Headroom G(mm)
		NORMAL	CREEP	NORMAL	CREEP					
500	3	4	1	0.1	0.4	5	1	625	32	400
1000	3	8	2	0.4	1.6	8	1	1250	62	600
2000	3	4	1	0.4	1.6	8	2	2500	67	600

Dimensions - mm

CAPACITY	A	B	C	D	E	F	G	H	I
500	238	388	102.5	125.5	38	25	36	18	440
1000	238	388	130.0	150.0	60	41	60	40	550
2000	238	388	130.0	150.0	60	41	60	40	550