

# **SPEED**<sup>®</sup>

SPUR GEARED CHAIN PULLEY BLOCK

**J K-series**



Established : 1964

Manufactured by:

**R. N. SURESH TOOLS CORPN.**

MUMBAI - 400 003

email : [rnstools@hotmail.com](mailto:rnstools@hotmail.com)

web site : [www.speedrns.com](http://www.speedrns.com)


**Safe ✦ Reliable ✦ Durable**

**WARRANTY**  
We Provide one  
Warrenty against any  
manufacturing defects.  
Ex. Our works

# SPEED<sup>®</sup>

## J K-series

SPUR GEARED CHAIN PULLEY BLOCK

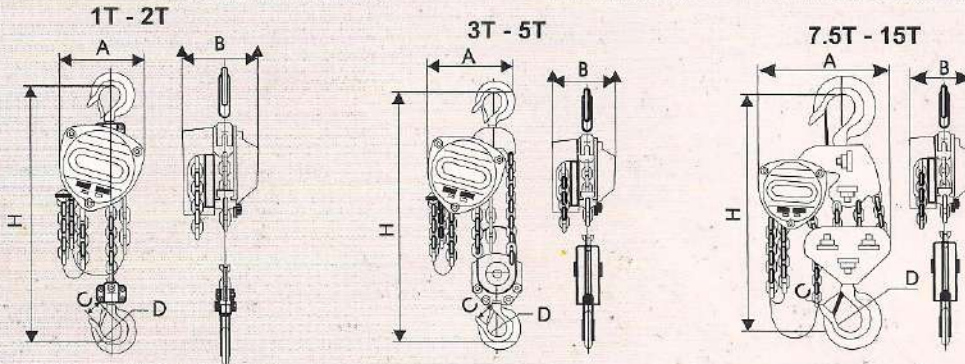

### FEATURES

- ▶ Capacity ranges from 1 Ton . to 20 Tons.
- ▶ Automatic double pawl braking system.
- ▶ Double cover protection.
- ▶ Light weight - robust construction.
- ▶ Low effort required to lift maximum load.
- ▶ Extra thick friction discs.
- ▶ Fully forged hooks - conform to - ISS - fitted with safety latches, as standard.
- ▶ Alloy Steel - Grade 80 - Load Chain.
- ▶ Zinc plated hand chain, as standard.
- ▶ Sealed bearings.
- ▶ Each Chain Block is proof tested to 50% overload.



### SPECIFICATIONS

Capacity (TONS)	1	2	3	5	7.5	10	20
Standard Lift (MTRS.)	3	3	3	3	3	3	3
No. of falls of load chain	1	1	2	2	3	4	8
Load Chain Diameter (MM)	6	8	8	9	10	10	10
Effort Required to lift rated load (KGS.)	25	34	37	36	38	38	40
Dimensions (mm)	A	149	176	31	249	256	580
	B	153	173	185	185	185	185
	C	29	35	39	49	50	54
	D	41	51	49	67	72	75
Head room (MM)	H	352	385	445	615	655	765
Additional Weight per MTR Lift (KGS.)	1.8	2.4	3.8	4.6	7.6	9.8	19.6
Net Weight with 3 MTRS lift (KGS.)	14	19	32	41	70	75	190
Gross Weight. (KGS.)	21	24	42	52	86	92	260

